

CUSTOM

RAIL OPTIONS

OTHER

GRAB RAILS, STANCHION POSTS
& ANCHORS

ENGINEERED FOR YOUR PROJECT

Our team works with you to design and manufacture custom rails to meet the specific requirements of your pool and project.

- **PROJECT-BASED DESIGN**
Tailored to your specifications and site requirements.
- **FLEXIBLE DIMENSIONS**
Custom heights, lengths, angles, and setbacks.
- **SITE-SPECIFIC SOLUTIONS**
Designed for unique pool layouts and configurations.
- **FAST TURNAROUND**
Built in-house for quick response times.




ADA GRAB RAILS

- Width: 12", 14", 16", or 18"
 - OD: 1.50"
- Wall Thickness: .120"
- Material: 316LSS
- Requires split escutcheon
- Flange (requires split escutcheons) or No Flange



STANCHION POSTS

- Heights: 54" or 96"
 - OD: 1.90"
- Materials: 304SS or 316SS
- Sliding ring available in 316SS

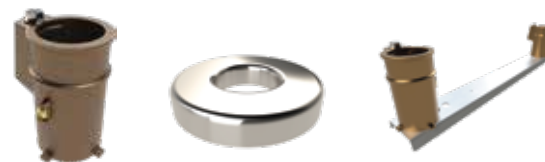

ANCHORS AND HARDWARE

- Wedge Anchors: 1.50" or 1.90" ID, 4" or 6" depth
- Channel Anchor Kits: 1.50" or 1.90" ID, 4" depth, 8" or 20" length
- Stanchion Anchors: 1.50" or 1.90" ID, 6" depth
- Escutcheon Plates: 1.50" or 1.90" ID, 4.50" OD (316SS)
- Split Escutcheon Plate: 1.50" ID, 4.125" OD (316SS)

UNIQUE BENEFITS



STAINLESS STEEL

Select from 304L & 316L stainless steel.



SETBACKS & SIZES

Designed to fit a variety of pool decks.



CUSTOM & STANDARD

Flexible solutions to meet any projects needs.



ADA COMPLIANT

ADA Compliant for commercial requirements.



MADE IN MONTANA

Built with care and precision in the USA.



ISO CERTIFIED


Intertek ISO 9001:2015 Certification

CUSTOM RAILS & LADDERS



Scan for more info!

OUR TEAM

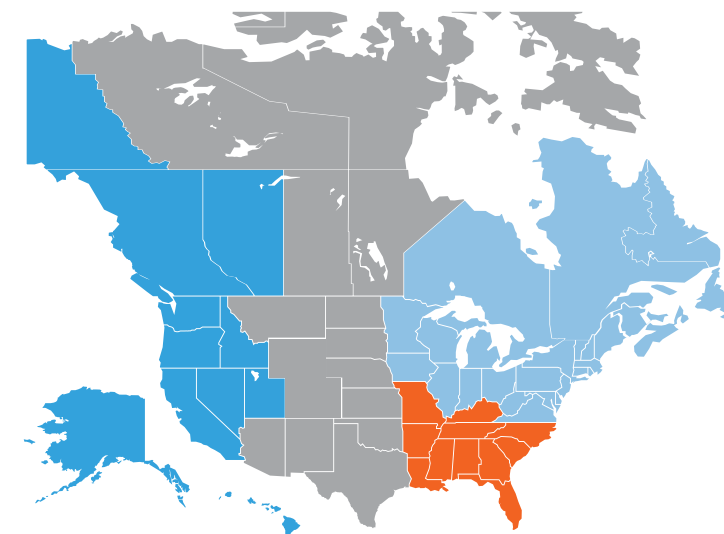

SALES TERRITORIES

PACIFIC REGION

(406) 541-8985
salespacific@aquacreek.com

MOUNTAIN REGION

(406) 541-8429
salesmountain@aquacreek.com

NORTHEAST REGION

(406) 541-8984
salesnortheast@aquacreek.com

SOUTHEAST REGION

(406) 541-8311
salessoutheast@aquacreek.com

CUSTOMER SERVICE

(406) 549-0769
customerservice@aquacreek.com
aquacreek.com

HANDCRAFTED
★ IN MISSOULA
MONTANA
EST. 2002



STAY IN TOUCH

9889 Garrymore Lane
Missoula, Montana 59808

Local | 406.549.0769
Toll Free | 888.687.3552

www.aquacreek.com
sales@aquacreek.com



Scan here for more
literature!

Aqua Creek Products



RAIL & LADDER GUIDE

INNOVATIVE
ACCESS
SOLUTIONS

PRETZEL

SOLD IN PAIRS

FIGURE 4

SOLD IN PAIRS

STAIR RAILS DECK RAILS

SOLD INDIVIDUALLY

LADDERS

SOLD INDIVIDUALLY

STEPS

SOLD INDIVIDUALLY



PRETZEL BEND RAILS

- Setbacks: 17", 26", or 30"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS




FIGURE 4 RAILS

- Setbacks: 26" or 30"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS



2 BEND STAIR RAIL

- Total Width: 48", 60", or 72"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS

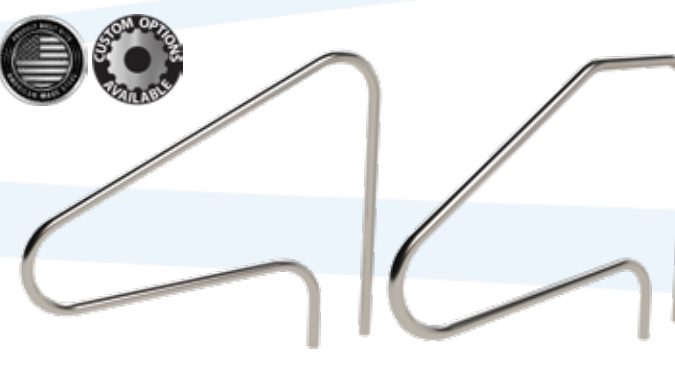

3 AND 4 BEND DECK RAIL

- Total Width: 48" or 60"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS



STANDARD POOL LADDERS

- Treads: 2, 3, 4, or 5
- Depths: 25", 27", 30", or 36"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS
- Tread Options: Stainless or ABS (20")



IN-WALL POOL STEPS

- 17.5 x 7 inches at the outer edges
- Depths: 5.5"
- Materials: Durable white injection molded plastic
- Tread Options: Safety textured step surface



PACIFIC PRETZEL BEND RAILS

- Setbacks: 26" or 30"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS



ADJUSTABLE FIGURE 4 RAILS

- Setback: 26"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS



3 BEND STAIR RAIL

- Total Width: 48", 60", or 72"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS



LONG REACH DECK RAIL

- Total Width: 48" or 60"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS



CROSS-BRACED POOL LADDERS

- Treads: 2, 3, 4, or 5
- Depths: 25", 27", 30", or 36"
- OD Options: 1.50" or 1.90"
- Wall Thickness: .065", .109", or .120"
- Materials: 304LSS or 316LSS
- Tread Options: Stainless or ABS (20")

