


UNIVERSAL ADAPTER PLATE

CATALOG NO. F-UAPPS

—Leaders in Recreation, Fitness and Ability——

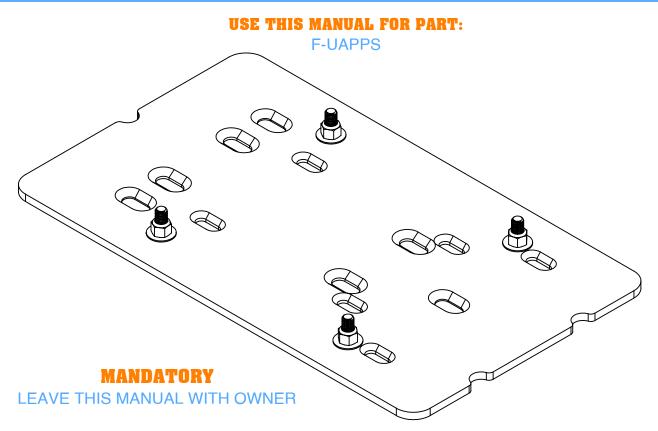

Read and follow all instructions.

Lift safety can only be ensured if the lift is installed and operated according to these instructions.

READ CAREFULLY

Check entire box and all packing materials for parts. Before beginning assembly, read the instructions and identify parts using the figures and parts listed in this document.

It is critical that all parts be carefully inspected prior to installation. If any damage occurred in transit, Aqua Creek Products, LLC must be notified within three days of receipt of unit.

Proper installation cannot be overstressed, as an improper installation voids Aqua Creek's warranty and may affect the safety of the user.

FOR SAFETY REASONS

- NEVER swim alone
- NEVER use the lift with a dry pool
- NEVER apply direct water pressure to the electronics
- NEVER permit children to play on or around the lift
- D0 N0T allow children to use the lift without adult supervision


Aqua Creek Products, LLC

9889 Garrymore Lane Missoula, MT 59808 Toll Free: (888) 687-3552 Local/Intnl: (406) 549-0769 www.aquacreek.com



PRODUCT COMPONENTS

FIGURE A

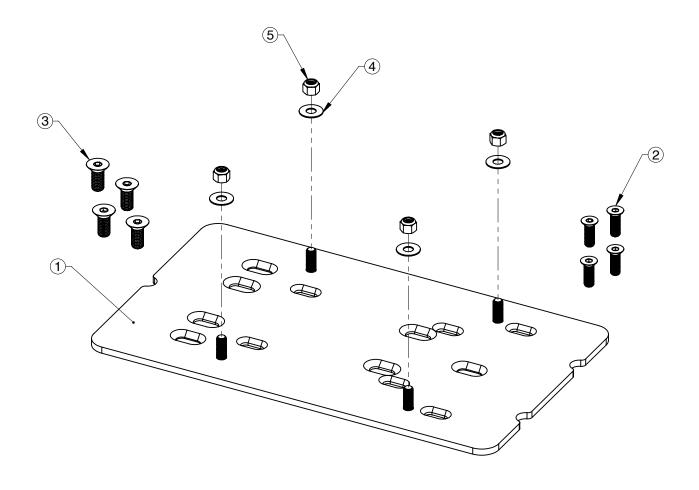

ANCHOR - UNIVERSAL ADAPTER PLATE - INV03427				
ITEM	PART NO.	QTY.	REV.	DESCRIPTION
1	INV03426	1	P1	WELDMENT UNIVERSAL ADAPTER PLATE (RGR2, ADM)
2	INV00357	4	P1	BC - 1/2"-13X1 1/2" FLAT HEAD COUNTERSINK
3	INV03440	4	P1	BC - 5/8"-11X1 1/2"
4	INV01169	4	P1	WF - 1/2" FLAT WASHER
5	INV00733	4	P1	NN - 1/2"-13 NYLOCK NUT
6	INV00249	1	P1	SILICONE - BLISTER PACKET - 6 GRAMS

*BLISTER PACKET NOT SHOWN

For service and/or replacement parts, contact Aqua Creek Products, LLC. Toll Free: (888) 687-3552 Local/Intnl: (406) 549-0769 www.AquaCreek.com



BOLT PATTERN CONFIGURATIONS


BOLT PATTERN OPTIONS FOR UNIVERSAL ADAPTER PLATE

△ NOTE PLATE ORIENTATION △

FIGURE B

WATER SIDE


<u>△ THIS SIDE TOWARDS POOL</u> <u>△</u>



USE WITH 5/8" BOLTS (x4 INCLUDED)

WATER SIDE


<u>△ THIS SIDE TOWARDS POOL</u>



USE WITH 1/2" BOLTS (x4 INCLUDED)

WATER SIDE


\triangle THIS SIDE TOWARDS POOL \triangle



USE WITH 5/8" BOLTS (x 3 INCLUDED)

WATER SIDE

△THIS SIDE TOWARDS POOL△



USE WITH 1/2" BOLTS (x4 INCLUDED)

For service and/or replacement parts, contact Aqua Creek Products, LLC. Toll Free: (888) 687-3552 Local/Intnl: (406) 549-0769 www.AquaCreek.com




PRODUCT INSTALLATION

STEP 1: LOCATE PLATE ORIENTATION

The Universal Adapter Plate bolts directly to the pre-installed anchor bolt patterns. Locate the corresponding hole slots from the diagram on the previous page. Install the plate and bolt down until tightened.

*NOTE THE PLATE ORIENTATION BEFORE LIFT INSTALLATION (see <u>FIGURE B</u> on the previous page).

STEP 2: INSTALL THE LIFT TO THE ADAPTER.

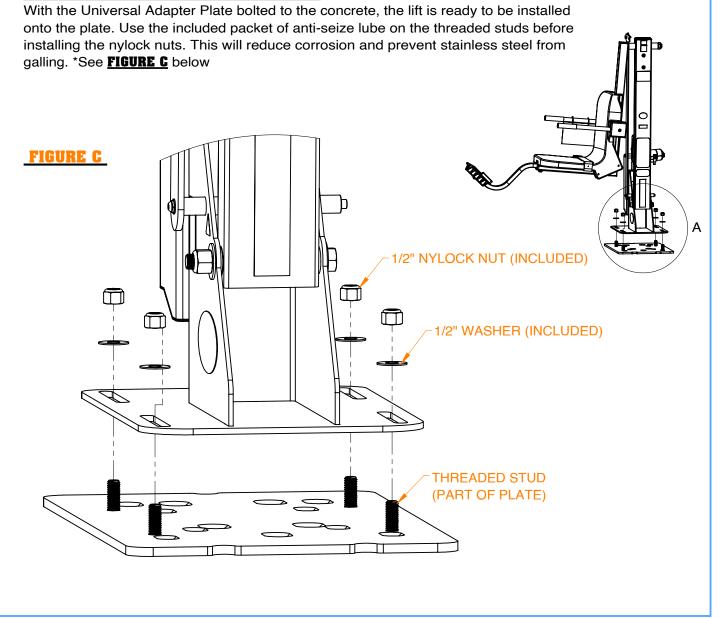



PROPER PLACEMENT OF LIFT

For ADA applications, the front edge of the lift's base plate must be 13.00" from the pool or spa wall in order to meet the ADA requirement of 16.00" from the pool wall to the centerline of the chair. For non ADA applications the lift may be closer to the pool's edge. See FIGURE 4 below.

FIGURE 4

